



CS 100/30 TANDEM PRIME M

Cod. PR-CS400-090-MT

Oil free reciprocating air compressors with soundproof cabinet, compressed air FAD of 10.77 CFM @ 72.5 PSI pressure. Receiver capacity 90 L, with internal surface treatment to protect against corrosion. Complete with membrane dryer to ensure maximum air purity. This compressor is available also in [145 PSI VERSION](#), [visit the appropriate section!](#)



Maximum simultaneous use: 4-6




Dental Chairs: 6

Medical Device CE 0425

Cod.	Air Dryer	 Air capacity	 FAD Fad @ 72.5PSI	 Motor	 Voltage Hz	 Receiver	 Noise Level	 RPM	 Duty Cycle	 max P.	 Size	 net Weight
CS 100/30 TANDEM PRIME M PR-CS400-090-MT	Yes	cfm 17.65	cfm 10.77	HP 3.9	230V 50Hz	GAL 23.78	db(A) 56	1360	70 %	PSI 116	inch 49x31.1x40.2	Lb 463.1
PR-CS400-090-MT3 PR-CS400-090-MT3	Yes	cfm 17.65	cfm 10.77	HP 3.9	400V 50Hz	GAL 23.78	db(A) 56	1470	70 %	PSI 116	inch 49x31.1x40.2	Lb 209.5
CS 100/30 TANDEM PRIME M PR-CS400-090-MT-6	Yes	cfm 19.77	cfm 11.65	HP 3.9	220V 60Hz	GAL 23.78	db(A) 56	1760	70 %	PSI 116	inch 49x31.1x40.2	Lb 209.5
PR-CS400-090-MT3 UL PR-CS400-090-MT3-UL	Yes	cfm 17.65	cfm 10.77	HP 3.9	400V 50Hz	GAL 23.78	db(A) 58	1470	70 %	PSI 116	inch 49x31.1x40.2	Lb 209.5
CS 100/30 TANDEM PRIME M UL PR-CS400-090-MT-6-UL	No	cfm 19.77	cfm 11.65	HP 3.9	220V 60Hz	GAL 23.78	db(A) 56	1760	70 %	PSI 116	inch 49x31.1x40.2	Lb 209.5

Air delivery performance

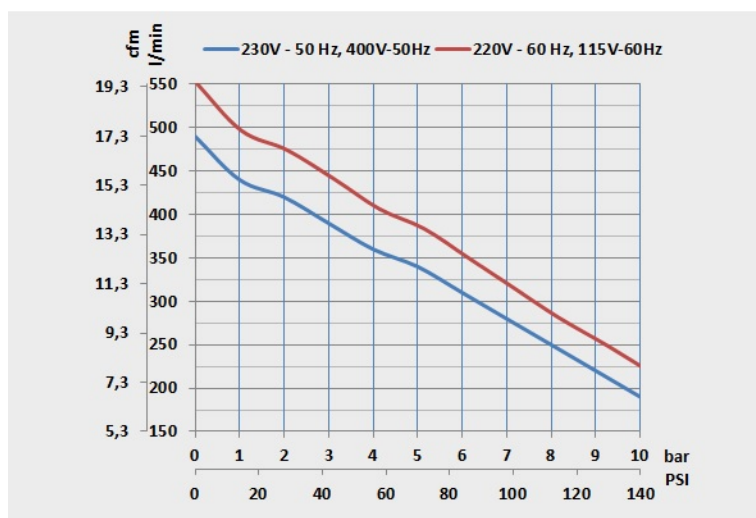

Maintenance kits

Kit.	Description	Type	Hours
TA-FL-0261-K-SCP	TANDEM PRIME 2 + 2-3 + 3 M kit Ordinary maintenance replacement kit for TANDEM PRIME 2+2, 3+3 M versions (100/30 TANDEM PRIME M, 100/50 TANDEM PRIME M). • 6 suction filters, code: TA-FL-058-C • 1 non-return valve pads, code: CO-PV-001 • 2 5 micron filter cartridges, code: TA-FL-001-C-SM • 2 0.01 micron filter cartridges, code: TA-FL-024-C2-SM • 4 o-rings for filters, cod. TA-FL-001-OR • 2 radiator filter cartridges, code: TA-FL-002-C • 2 0.01 micron filter cartridges, code: TA-FL-076-C • 2 AMG150 water separator cartridges, code: TA-FL-074-C • 4 o-rings for filters, cod. TA-FL-075-OR Replace the filtration cartridges every 2 years.	Ordinary	1.000h/1y
PR-GC-033-K-SCP	TANDEM PRIME 2+2 kit The PRIME 1.5 + 1.5 kW (TANDEM PRIME 2+2) spare parts kit includes: • 4 suction filters, code: TA-FL-058-C • 8 O-rings, code: MA-PC018 • 4 piston rings , code: MA-MG00001 • 4 piston guide rings, code: MA-MG00003 • 4 expansion rings for the segments, code: MA-MG00024 • 4 complete valve plates, code: MA-MG-02002P-C-P • 1 non-return valve pad, code: CO-PV-001 The recommended maintenance intervals for this compressor are 4000 hours /4 years.	Extraordinary	4.000h/4y